

Pop 12 Ring

Harbour design 2017


Semi-recessed wall and ceiling lamp for interior lighting. White or black painted diffuser, with a front ring, available in copper, brass, white or black color.

Lampada semi-incasso da parete e plafone per interni. Diffusore bianco o nero, con inserto frontale circolare, disponibile color rame, ottone, bianco o nero.

Halb-Einbauleuchte für Wand und Decke für Innen. Lichtschirm weiß oder schwarz lackiert, mit einem runden Kopf verfügbar in den Farben Kupfer, Messing, Weiß oder Schwarz.

Applique et plafonnier semi-encastré pour intérieur. Diffuseur laqué blanc ou noir, avec une extrémité circulaire, disponible laquée cuivre, laiton, blanc ou noir.

Lámpara semi-empotrable de pared-plafón para interior. Difusor pintado blanco o negro, con una extremidad circular, disponible pintada cobre, latón, blanco o negro.

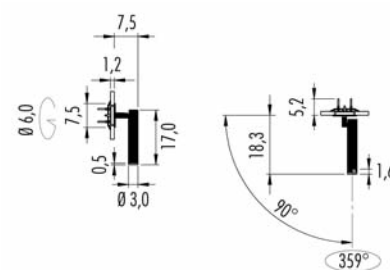

IP20 MC-E=3

500 m/A 6W CRI>90

PR12.2


Led color	Nominal lm	Beam spread
2 = 2700°K	528	S = 24°
3 = 3000°K	552	
4 = 4000°K	594	

- (m-M) Converter
- DRV.500.15 (1-1) on/off
 - DRV.501.50 (1-7) DALI - Push - 1...10V (Remote installation)
 - DRV.502.20 (1-3) DALI
 - DRV.503.20 (1-3) Push - 1...10V
 - DRV.504.10 (1-1) IGBT - Triac

Frame - Struttura	Ring - Anello
02 Black-Nero	Black-Nero
06 White - Bianco	White - Bianco
KC Black-Nero	Copper-Rame
KS Black-Nero	Brass-Ottone
WC White - Bianco	Copper-Rame
WS White - Bianco	Brass-Ottone

(m-M) = min. Led unit - Max Led unit



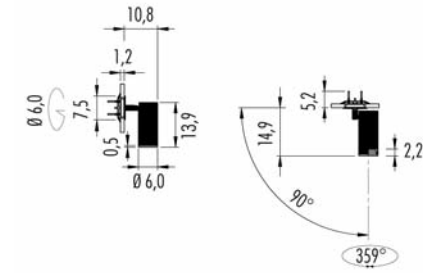

IP20	MC-E=3	CE
350lm/A	11W	CRI>85
PR12.3		
Led color	Nominal lm	Beam spread
2 = 2700°K	1195	M = 38°
3 = 3000°K	1257	S = 22°
4 = 4000°K	1313	T = 10°

© (m-M) Converter

DRV.350.1L (1-1)	on/off
DRV.350.25 (2-2)	on/off
DRV.351.40 (1-3)	DALI - Push - 1...10V (Remote installation)
DRV.352.15 (1-1)	DALI
DRV.353.15 (1-1)	Push - 1...10V
DRV.354.18 (1-1)	IGBT - Triac


□ *Frame - Struttura* *Ring - Anello*

02 ● Black-Nero	● Black-Nero
06 ○ White-Bianco	○ White-Bianco
KC ● Black-Nero	● Copper-Rame
KS ● Black-Nero	● Brass-Ottone
WC ○ White-Bianco	● Copper-Rame
WS ○ White-Bianco	● Brass-Ottone

Pop 12 Ring



50

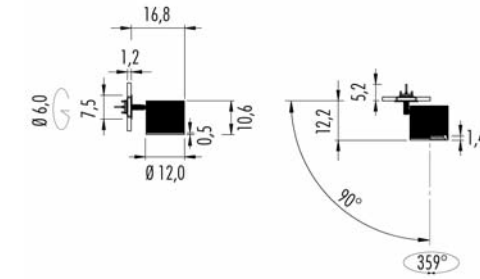

IP20	MC-E=3	CE	▽	⊕
350m/A	12,5W	CRI>85		
PR12.6				
■ Led color	Nominal lm	▲ Beam spread		
2 = 2700°K	1578	L = 60°		
3 = 3000°K	1669	S = 24°		
4 = 4000°K	1740	T = 12°		
© (m-M) Converter				
DRV.350.1L (1-1) on/off				
DRV.351.40 (1-3) DALI - Push - 1...10V (Remote installation)				
DRV.352.15 (1-1) DALI				
DRV.353.15 (1-1) Push - 1...10V				
DRV.354.18 (1-1) IGBT - Triac				

IP20	MC-E=3	CE	▽	⊕
500m/A	18,5W	CRI>85		
PR12.6				
■ Led color	Nominal lm	▲ Beam spread		
2 = 2700°K	2176	L = 60°		
3 = 3000°K	2301	S = 24°		
4 = 4000°K	2400	T = 12°		
© (m-M) Converter				
DRV.500.1L (1-1) on/off				
DRV.501.50 (1-3) DALI - Push - 1...10V (Remote installation)				
DRV.502.20 (1-1) DALI				
DRV.503.20 (1-1) Push - 1...10V				
DRV.504.20 (1-1) IGBT - Triac				

IP20	MC-E=3	CE	▽	⊕
700m/A	27W	CRI>85		
PR12.6				
■ Led color	Nominal lm	▲ Beam spread		
2 = 2700°K	2914	L = 60°		
3 = 3000°K	3081	S = 24°		
4 = 4000°K	3213	T = 12°		
© (m-M) Converter				
DRV.700.1L (1-1) on/off				
DRV.700.50 (1-1) DALI - Push - 1...10V (Remote installation)				

□	Frame - Struttura	Ring - Anello
02	● Black-Nero	● Black-Nero
06	○ White - Bianco	○ White - Bianco
KC	● Black-Nero	● Copper-Rame
KS	● Black-Nero	● Brass-Ottone
WC	○ White - Bianco	● Copper-Rame
WS	○ White - Bianco	● Brass-Ottone

51



Red/Rosso



Rose/Rosa



Green/Verde



Blue/Blu



Brass/Ottone



Copper/Rame

The colour rendering of these samples is approximate, not being possible to faithfully reproduce by offset printing.

I campioni colore sono solamente indicativi, non essendo possibile la riproduzione fedele a mezzo stampa offset.

Durch den Offset-Druck sind leichte Farbabweichungen der hier gezeigten Muster möglich.

Les échantillons de couleurs sont indicatifs, l'impression papier ne permettant pas une reproduction fidèle.

Las muestras de color son sólo indicativas, no siendo posible una reproducción fiel mediante impresión en papel.

Ⓐ Alimentatore incluso
control gear included
Vorschaltgerät mitgeliefert
platine d'alimentation fournie
alimentador incluido

Ⓒ Converter incluso
Converter included
Konverter mitgeliefert
Convertisseur fourni
Convertidor incluido

Ⓕ Lampadina inclusa
including bulb
Leuchtmittel inklusiv
ampoule comprise
bombilla incluida

Ⓓ Trasformatore incluso
transformer included
Trafo mitgeliefert
transformateur fournie
transformador incluido

Ⓐ Alimentatore non incluso
control gear not included
Vorschaltgerät nicht mitgeliefert
platine d'alimentation non fournie
alimentador excluido

Ⓒ Converter non incluso
Converter not included
Konverter nicht mitgeliefert
Convertisseur non fourni
Convertidor excluido

Ⓕ Lampadina non inclusa
Bulb not included
Leuchtmittel nicht mitgeliefert
Ampoule non fourni
Bombilla excluida

Ⓓ Trasformatore non incluso
transformer not included
Trafo nicht mitgeliefert
transformateur non fournie
transformador excluido

IP identification

IP2X protezione contro corpi estranei ≥ 12mm
protection against solid objects ≥ 12mm
Schutz gegen Fremdkörpern ≥ 12 mm
protection contre des corps étrangers ≥ 12mm
protegido contra objetos extraños ≥ 12mm

IP4X protection against solid objects ≥ 1mm
protezione contro corpi estranei ≥ 1mm
Schutz gegen Fremdkörpern ≥ 1mm
protection contre des corps étrangers ≥ 1mm
protegido contra objetos extraños ≥ 1mm

IPX0 nessuna protezione
no protection
kein Schutz
non protégé
sin protección

“Creativity is inventing, experimenting, growing, taking risks, breaking rules, making mistakes, and having fun.”

Mary L. Cook